


Adjustable Upright Specifications

Construction:

- Aluminum Alloy 6063-T5
- Clear Anodize Finish
- Typical Wall Thickness .062"
- Steel Collar Construction

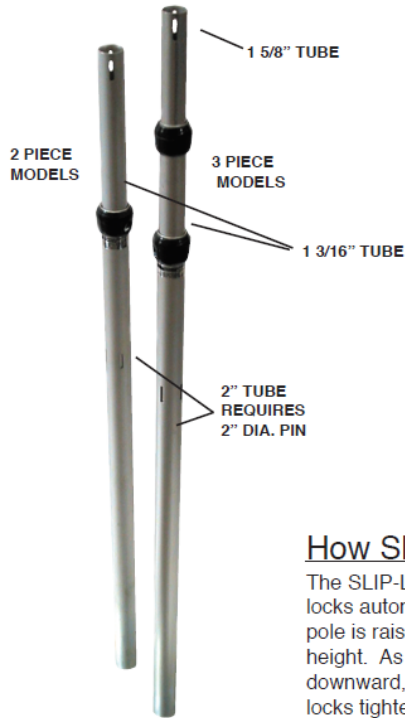

2 PC ADJUSTABLE UPRIGHT	
Part #	Size
TS35	3' - 5'
TS47	4' - 7'
TS58	5' - 8'
TS610	6' - 10'
TS712	7' - 12'
TS814	8' - 14'
TS916	9' - 16'
TS1018	10' - 18'
TS1120	11' - 20'
TS1222	12' - 22'
TS1324	13' - 24'
TS1426	14' - 26'

3 PC ADJUSTABLE UPRIGHT	
Part #	Size
TS511	5' - 11'
TS614	6' - 14'
TS717	7' - 17'
TS820	8' - 20'
TS923	9' - 23'

Features:

- Unique Slip-Lock Feature
- Easy to set-up, accurate and rapid height adjustments
- Quickly adjusts to an height within the specific model range
- No tools required for set-up or disassembly
- No knobs or wing nuts to adjust
- All tube surfaces have protective anodized coating
- Longer 2-pc and 3-pc Uprights available
- Repair Collar Kit Available
- Special order Black Anodize Finish available for an additional cost
- Repair ends available (see catalog)

How Slip-Lock Works

The SLIP-LOCK collar assembly locks automatically when the inner pole is raised vertically to the desired height. As a vertical load is applied downward, the ball-taper lock feature locks tighter. The more pressure applied downward the tighter it will lock. To release the lock, simply raise the inner pole slightly and lift the release ring. For **SAFETY**, hold the inner pole firmly while raising or lowering the height.

Pictures below are samples of how you can design a booth, or construct a room divider using the pipe and bases with drapery.

